

# ACRYBAND

All purpose, conformable acrylic resin-impregnated Polyurethane sealing material.

## APPLICATIONS

- Suitable for sealing regular and irregular gaps against dust and draughts.
- Used by window & door contractors and in log cabin & timber house construction.
- Dust, dirt and waterproof sealing in motor vehicle manufacturing.
- D.I.Y. applications.

## ADVANTAGES

- Acryband is economical and easy to use.
- Expands within minutes of insertion, evening out all irregularities.
- Resistance to adverse weather and temperature conditions makes it an ideal sealing medium for most external applications.
- Needs no primer and is clean to handle.


## PHYSICAL PROPERTIES/TECHNICAL DATA

- **Composition:** Flexible acrylic resin-impregnated Polyurethane foam.
- **Colour:** Grey.
- **Size:** Supplied cut to size in various widths and thicknesses or die-cut to your requirements.
- **Weathering:** Retains elasticity and sealing qualities (if compressed). Is resistant to ageing (if not directly exposed to UV rays for an extended period of time).
- **Temperature Range:** Remains permanently resilient and effective from -20 °C to +120 °C.
- **Recovery:** Can be compressed by up to 95 % of its thickness and returns to original size within minutes of release.
- **Resistance:** Not sensitive to decay, fungi, weak acids or alkaline solutions. Chemically inert.

## DIRECTIONS FOR USE

- **Dust off area of application and choose an oversize section of Acryband according to your particular needs – see compression chart.**
- **Compress Acryband and insert into gap. Acryband will expand within minutes to even out all irregularities and produce a completely effective seal.**
- **Acryband can be supplied with self-adhesive backing on one side if required. In this instance, ensure that the surface is dust free, remove the backing paper and press adhesive side of Acryband to surface as required.**

Whilst this document has been prepared in good faith, Sondor Industries (Pty) Ltd accept no contractual liability of any kind to any person in respect of its contents or any use made thereof, nor must it be assumed that any such use will not infringe any patent. This document shall form no part of any contract with a customer. The data supplied on this sheet is typical and in no way reflects the final resultant values of the respective products.

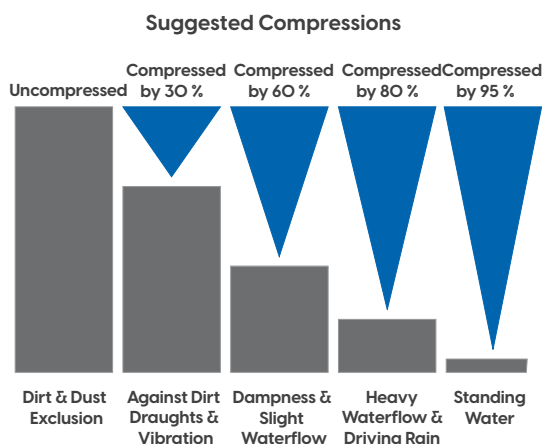

**sondor**  
PERFORMANCE FOAMS



**CAPE TOWN:** Tel: (021) 959 9400, E-mail: Ctn.Sondor@ecobat.com • **DURBAN:** Tel: (031) 705 4220, E-mail: Dbn.Sondor@ecobat.com  
**JOHANNESBURG:** Tel: (011) 452 4530, E-mail: Jhb.Sondor@ecobat.com • **PORT ELIZABETH:** Tel: (041) 486 2231, E-mail: Pe.Sondor@ecobat.com  
**PRETORIA:** Tel: (012) 803 4471, E-mail: Pta.Sondor@ecobat.com • **EXPORTS:** Tel: +27-21-959 5900, E-mail: Exports.Sondor@ecobat.com  
**HEAD OFFICE:** Tel: (021) 959 5900, E-mail: Ho.Sondor@ecobat.com • **EAST LONDON AGENT** Johnny Grant (043) 743 3067/68  
**GARDEN ROUTE AGENT:** IMPI Wire (044) 802 7300

Revision No.: 8/2022