

CORDEX

Sealant backing cord made from low density, non cross-linked, closed cell, expanded Polyethylene foam.

APPLICATIONS

- Used in various types of expansion joints as a backer for joint sealant or caulking materials.
- Used in vertical joints and elevated horizontal joints in concrete, brick or metal construction.
- Used in copings, doors, curtain wall construction and pre-cast units.
- Can also be used for piping in the furniture industry.

ADVANTAGES

- Cordex is waterproof.
- Compatible with joint sealants such as silicone, polysulphide, polyurethane, butyl, bitumen and acrylic sealants.
- Requires no bond breaker between the cord and the sealant.
- Is highly flexible and has a good recovery capacity, providing a permanent secondary seal behind the joint sealant.
- Hour-glass cross-section cell structure ensures that stresses are uniformly distributed so that maximum bonding occurs at high stress areas.

PHYSICAL PROPERTIES/TECHNICAL DATA


- Composition: Closed cell, expanded Polyethylene.
- Diameter: -6 mm to 60 mm.
- Shrinkage: < 5% @ 70 °c / 24 Hrs
- Temperature Range: -10 °c to 70 °c
- Water Absorption: 5 % of volume after 24 hrs.
- General: Totally inert and has no rodent attraction. Must not be stored in clear plastic bags. Has a skin surface, therefore no sealants adhere to it's surface.

Standard Sizes:

Nominal Diameter	Roll Size	Nominal Diameter	Roll Size
6 mm	100 m	25 mm	100 m
8 mm	100 m	30 mm	100 m
10 mm	100 m	40 mm	50 m
12 mm	100 m	45 mm	50 m
15 mm	100 m	50 mm	50 m
20 mm	100 m	60 mm	50 m

Other roll sizes available on request. Availability of non-standard sizes dependent on order quantity.

Whilst this document has been prepared in good faith, Sondor Industries (Pty) Ltd accept no contractual liability of any kind to any person in respect of its contents or any use made thereof, nor must it be assumed that any such use will not infringe any patent. This document shall form no part of any contract with a customer. The data supplied on this sheet is typical and in no way reflects the final resultant values of the respective products.

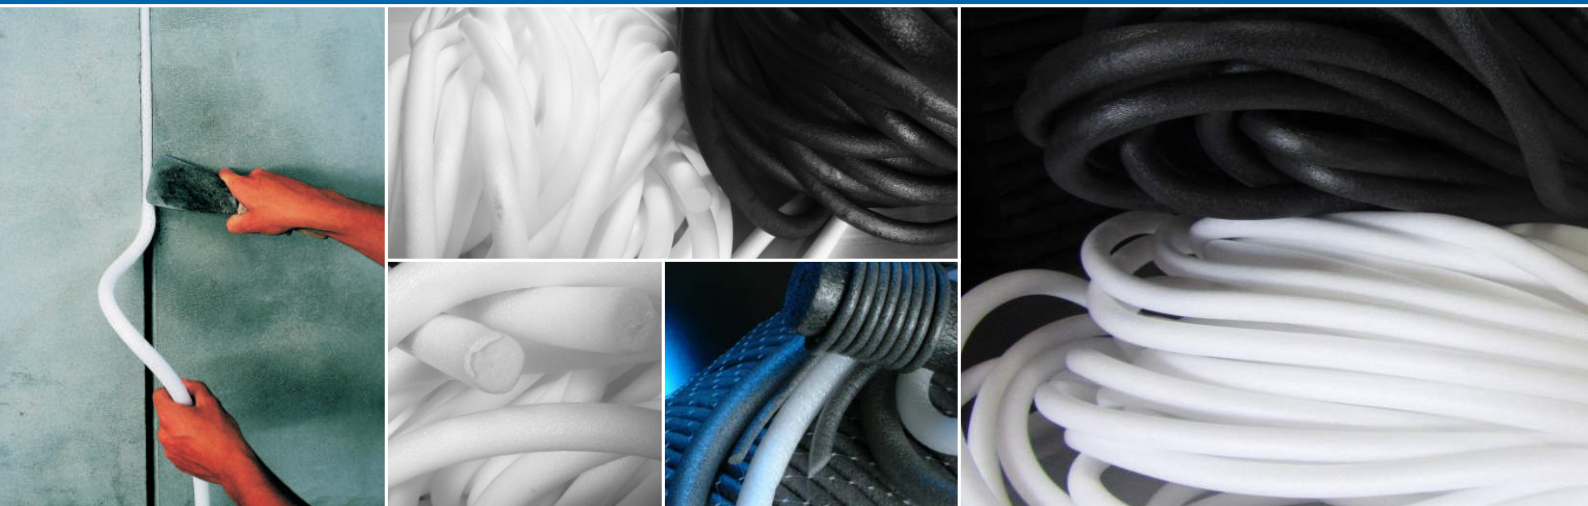

sondor
PERFORMANCE FOAMS



CAPE TOWN: Tel: (021) 959 9400, E-mail: SondorCPT@sondor.co.za • **DURBAN:** Tel: (031) 705 4220, E-mail: SondorDBN@sondor.co.za
JOHANNESBURG: Tel: (011) 452 4530, E-mail: SondorJHB@sondor.co.za • **PORT ELIZABETH:** Tel: (041) 486 2231, E-mail: SondorPE@sondor.co.za
PRETORIA: Tel: (012) 803 4471, E-mail: SondorPTA@sondor.co.za • **EXPORTS:** Tel: +27-21-959 5900, E-mail: SondorEXPORTS@sondor.co.za
HEAD OFFICE: Tel: (021) 959 5900, E-mail: SondorHO@sondor.co.za • **EAST LONDON AGENT:** Johnny Grant (043) 743 3067/68
GARDEN ROUTE AGENT: IMPI Wire (044) 802 7300

Revision No: 11/2024